


Edition Shadow

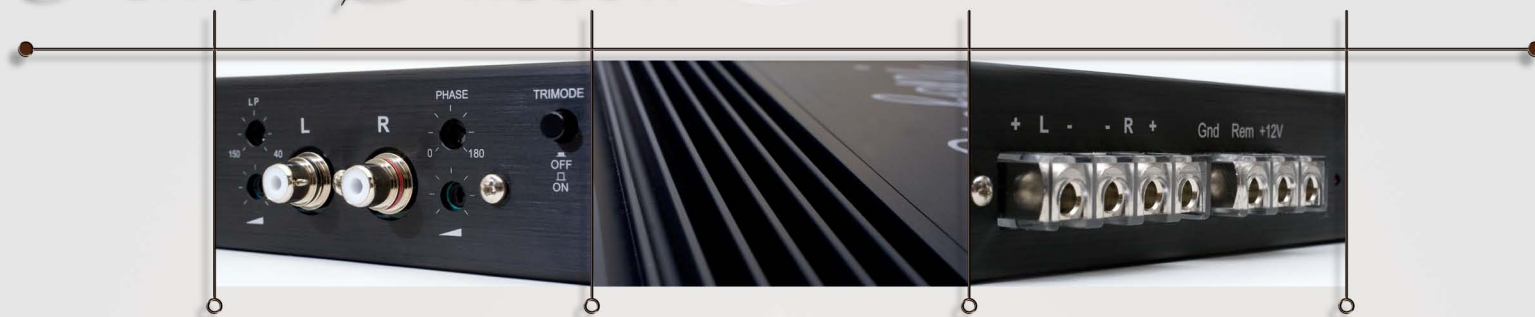

MODEL	50.2 SPX	100.2 SPX
Power Supply	11-14,4 Vcc	•
Total Armonic Distortion	0,01 %	•
Stand-by Current	1,2 A	2 A
Input Sensitivity	0,4 - 8 V	•
Input Impedance	48 Kohm	•
Current Draw	76 A	116 A
Subsonic Filter	25 Hz	•
Active Cross-over	L/P 12dB x octave • 40 - 150 Hz	•
Phase Reg. for Sub Range	0° - 180°	•
Frequency Response	+/- 1 dB • 10 Hz - 30 KHz	•
S./Noise ratio	> 100 db	•
Dimension	315x187x40 mm	632x187x40 mm
Weight	3,5 Kg	5,8 Kg

Output Power

50.2 SPX	100.2 SPX
4 ohm @ 12 V • 80 W x 2	4 ohm @ 12 V • 125 W x 2
2 ohm @ 12 V • 140 W x 2	2 ohm @ 12 V • 220 W x 2
1 ohm @ 12 V • 220 W x 2	1 ohm @ 12 V • 370 W x 2
4 ohm @ 12 V • 280 W x 1	4 ohm @ 12 V • 460 W x 1
2 ohm @ 12 V • 440 W x 1	2 ohm @ 12 V • 770 W x 1

Amplifiers